
technicalnote

Chicago Metallic® 6-Foot Drywall Tee Installation

Chicago Metallic 6-foot cross tees increase installation efficiency, allowing for main runner spacing to be pushed out to 6 feet on center (O.C.), reducing main runners and hanger wires in a given space. Always stagger the butt joints and install the long edges of the drywall sheets parallel to main runners.

NON FIRE RATED CEILINGS

640 and 660 Furring Runners - 6 feet O.C.

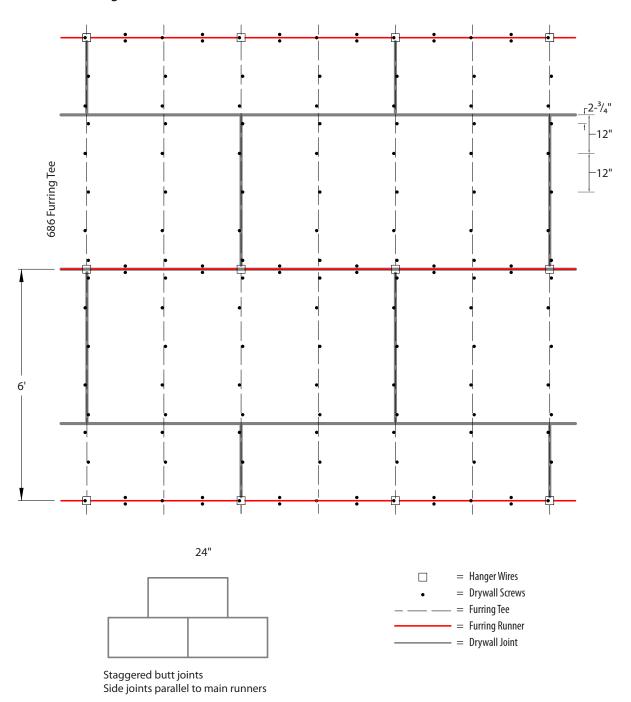


Chicago Metallic 6-Foot Drywall Tee Installation


FIRE RATED CEILINGS

3-hour fire rated UL Design No. H506 shown, for further information please refer to **UL.com**

670 Furring Runners - 6 feet O.C.

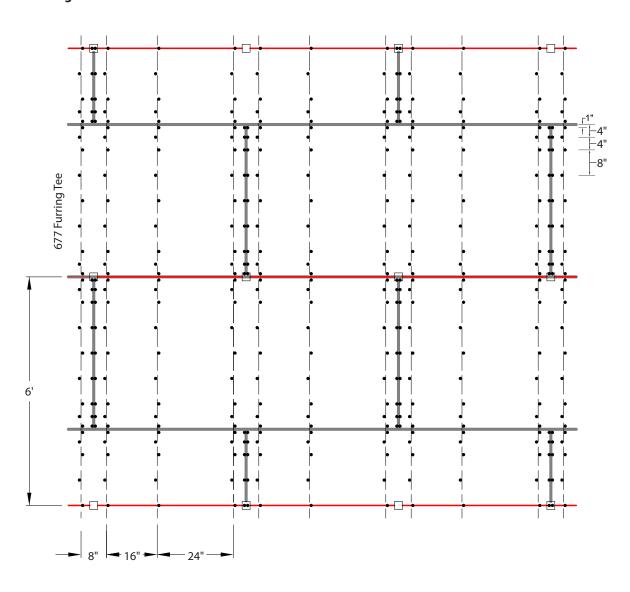


Hanger WiresDrywall ScrewsFurring TeeFurring RunnerDrywall Joint



Staggered butt joints Side joints parallel to main runners

Chicago Metallic 6-Foot Drywall Tee Installation

OVERALL REDUCTION IN MAIN RUNNERS WHEN UTILIZING 6-FOOT CROSS TEES VS. 4-FOOT CROSS TEES

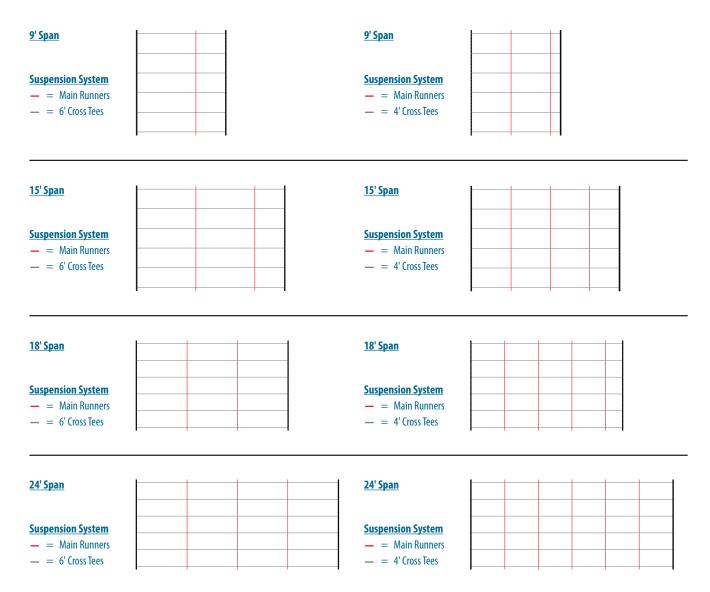

Have questions?

Contact the Rockfon Technical Services Team by calling 800-323-7164 and we can provide assistance on your project.



Rockfon 4849 SOUTH AUSTIN AVE., CHICAGO, IL 60638 / USA and Canada: 800-323-7164 / Fax: 800-222-3744 / rockfon.com