


Rockfon[®] Traditions[™] Panels and Cornices

Features & Benefits

- Embossed steel ceiling panels
- Lay-in or Nail-up panel designs available
- Lay-in panels used with standard 15/16" T-bar suspension grid for full plenum access
- Nail-up panel design installed on furring strips for ceiling and/or wall applications
- Perimeter angles, cornices and accessories are available for a complete authentic installation

Applications

- Restaurants
- Hotels
- Casinos
- Lobbies
- Retail

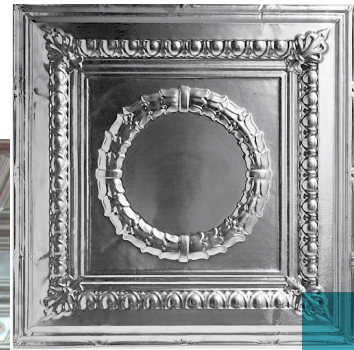

Project – Lobby Renovation in Texas, USA
Product – Rockfon[®] Traditions[™] Embossed Metal Panels, Metal Cornices

Rockfon® Traditions™ Panels and Cornices

LEED® v4.1 Highlights


Materials and Resources (MR)

Waste Management Planning	✓
Interiors Life Cycle Impact Reduction	✓
Environmental Product Declarations	✓
Sourcing of Raw Materials	✓
Material Ingredients	—
Waste Management	✓

Indoor Environmental Quality (EQ)

Low-Emitting Materials	✓
Interior Lighting	—
Acoustic Performance	—


Recycled Content: up to 85%



Family Number & Name	Panel Profile	Dimension	Material	Fire Class	Low VOC	Recycled Content
PNL: Traditions™ Metal Panel	LAYIN: Lay-In	24" x 24" 24" x 48"	STL: Steel	A	✓	up to 85%
	NAILUP: Nail-Up	24" x 48"				
FILLPNL: Traditions™ Metal Filler Panel	FILLER: Filler Panel (for perimeter use)	24" x 48"				

- Lay-In panels are for use in 15/16" suspension grid.
- Lay-In panels require hold down clips or gypsum lay-in backer panel.

Standard Colors:



01
White



08
Black



44
Satin Silver



888
Winchester
Grey

Premium Colors:



Color
Chart




Custom
(Color Match)

15/16" Suspension Systems	1-3/8" Suspension Systems
1200, 200 and Fire rated systems	660 systems
Traditions™ Lay-in Panel	Traditions™ Lay-in Panel

Rockfon® Traditions™ Pattern Selection


For 2' x 2' Lay-in panels, 2' x 4' Lay-in panels, and 2' x 4' Nail-up panels

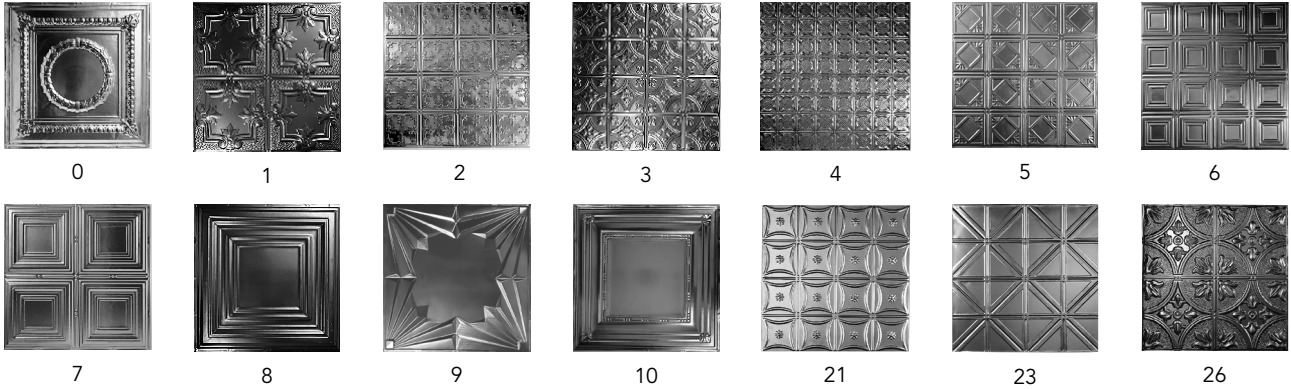

For 2' x 2' coffered Nail-up panel, pattern 36 only





















Filler panels for perimeter use, 2' x 4' for field cutting

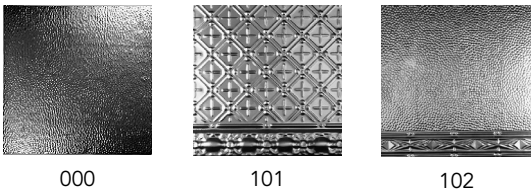

- Tile images represent 2' x 2' tile design. 2' x 4' panel design consists of two (2) 2' x 2' designs.
- P36 is a coffered panel with a deep recessed design. Requires installation on 1" x 2" furring strips.
- Panels not approved for exterior use.
- Bare steel panels are chromium treated and require oil-based paint or polyurethane to prevent rusting and tarnishing.

Metal Cornices



Cornice Type (Family Name & Detail TRADITIONS:CORNICE)	Dimensions and Pattern	Material	NRC	Fire Class	Low VOC	Recycled Content
STRAIGHT: Straight Face Cornice	63.40.030: Traditions™ Cornice - P30  	STL: Steel	-	A	✓	up to 85%
CONVEX: Convex Face Cornice	63.40.020: Traditions™ Cornice - P20  					
	63.40.035: Traditions™ Cornice - P35  					
CONCAVE: Concave Face Cornice	63.40.040: Traditions™ Cornice - P40  					
	63.40.050: Traditions™ Cornice - P50  					
	63.40.060: Traditions™ Cornice - P60  					
	63.40.063: Traditions™ Cornice - P63  					
	63.40.075: Traditions™ Cornice - P75  					
GIRDER: Girder Nosing	63.40.015: Traditions™ Girder Nosing - P15  					

Note:

- Cornice and Girder Nosing standard length 4'.
- Cornices and Girder Nosing ships flat and needs to be field bent to achieve the projections listed.
- Cornices and Girder Nosing not approved for exterior use.



Rockfon® Traditions™ Panels and Cornices

Material

Steel



Fire Performance

Surface burning characteristics:
UL723 (ASTM E84) Flame Spread Index: 0
Smoke Developed Index (UL Labeled): 0



Environment

Up to 85% recycled content
100% locally recyclable



Hygiene

Metal provides no sustenance
to microorganisms



Cleaning

Damp cloth



Warranty

1-Year Limited Product Warranty
See rockfon.com

020521

Rockfon

4849 S. Austin Ave.
Chicago, IL 60638 USA

2021 | Subject to alterations in range and product technology
without prior notice. Rockfon accepts no responsibility for printing errors.
© ROCKWOOL International A/S 2018. All rights reserved.
® denotes a trademark that is registered in the United States of America.

Tel. +1-800-323-7164
cs@rockfon.com
rockfon.com