

DATASHEET

Rockfon Sonar® dB 43



Sounds Beautiful

Rockfon Sonar® dB 43







- Combines enhanced room-to-room sound insulation as well as a high level of sound absorption (Class A) for flexible office layouts where high performance is important
- Made from a 40mm stone wool core with a high performance membrane on the back which reduces the transmission of noise from room-to-room
- Wide range of dimensions in semi-concealed and visible grid options
- Easy to install and clean with a vacuum or damp cloth

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: high-performance membrane
- Durable painted edges

Application Areas

- Office
- Healthcare
- Education

Edge detail	Module size (mm)	Weight (kg/m ²)	MS / MS easy access (mm)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	600 x 600 x 40	7.0	50/200	Rockfon® System T24 A™	39%		6.78	8.87
	1200 x 600 x 40		50/200	Rockfon® System T24 A™				
 E15	600 x 600 x 40	7.0	60/200	Rockfon® System T15 E™	39%		6.78	8.87
	1200 x 600 x 40		60/200	Rockfon® System T15 E™				
 E24	600 x 600 x 40	7.0	60/200	Rockfon® System T24 E™	39%		6.78	8.87
	1200 x 600 x 40		60/200	Rockfon® System T24 E™				

MS = Minimum Suspension

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/uk-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : 0.90 (Class A)



Direct sound insulation
 R_w = 22 dB



Room to room sound insulation
 $D_{n,f,w}$ = 43 dB


$D_{n,f,w}$ with Rockfon Acoustimass = 53* dB

$D_{n,f,w}$ with Rockfon Soundstop 21 dB = 52* dB

$D_{n,f,w}$ with Rockfon Soundstop 30 dB = 56* dB

The sound insulation properties (R_w , $D_{n,f,w}$) presented in the datasheet represent A-edge tiles.

*) Values obtained on the basis of theoretical analysis.

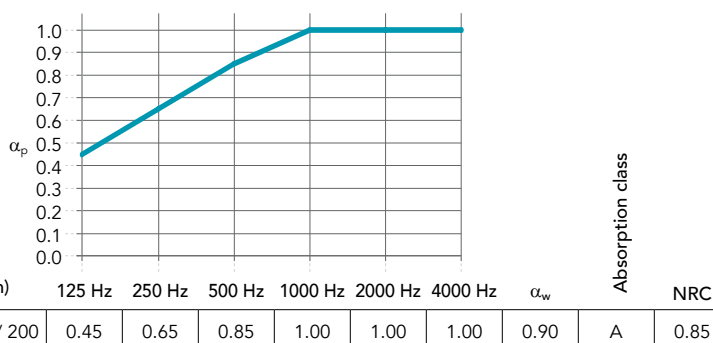

Reaction to fire
 A1



Light reflection
 85%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning

- Vacuum
- Damp cloth
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide.



Hygiene
 Stone wool provides no sustenance to microorganisms



Thermal insulation
 Thermal conductivity: λ_D = 40 mW/mK
 Thermal resistance: R = 1.00 m²K/W



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

09.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

