

# Rockfon<sup>®</sup> Facett<sup>™</sup>





## Features & Benefits

- For industrial applications and enclosed parking garages
- Excellent sound absorption (NRC = 1.00)
- Excellent thermal insulation (up to R = 14.0 and RSI = 2.47)
- Fire Performance - Class A
- Available in square lay-in

## Applications

- Enclosed Garage
- Light Industry
- Heavy Industry

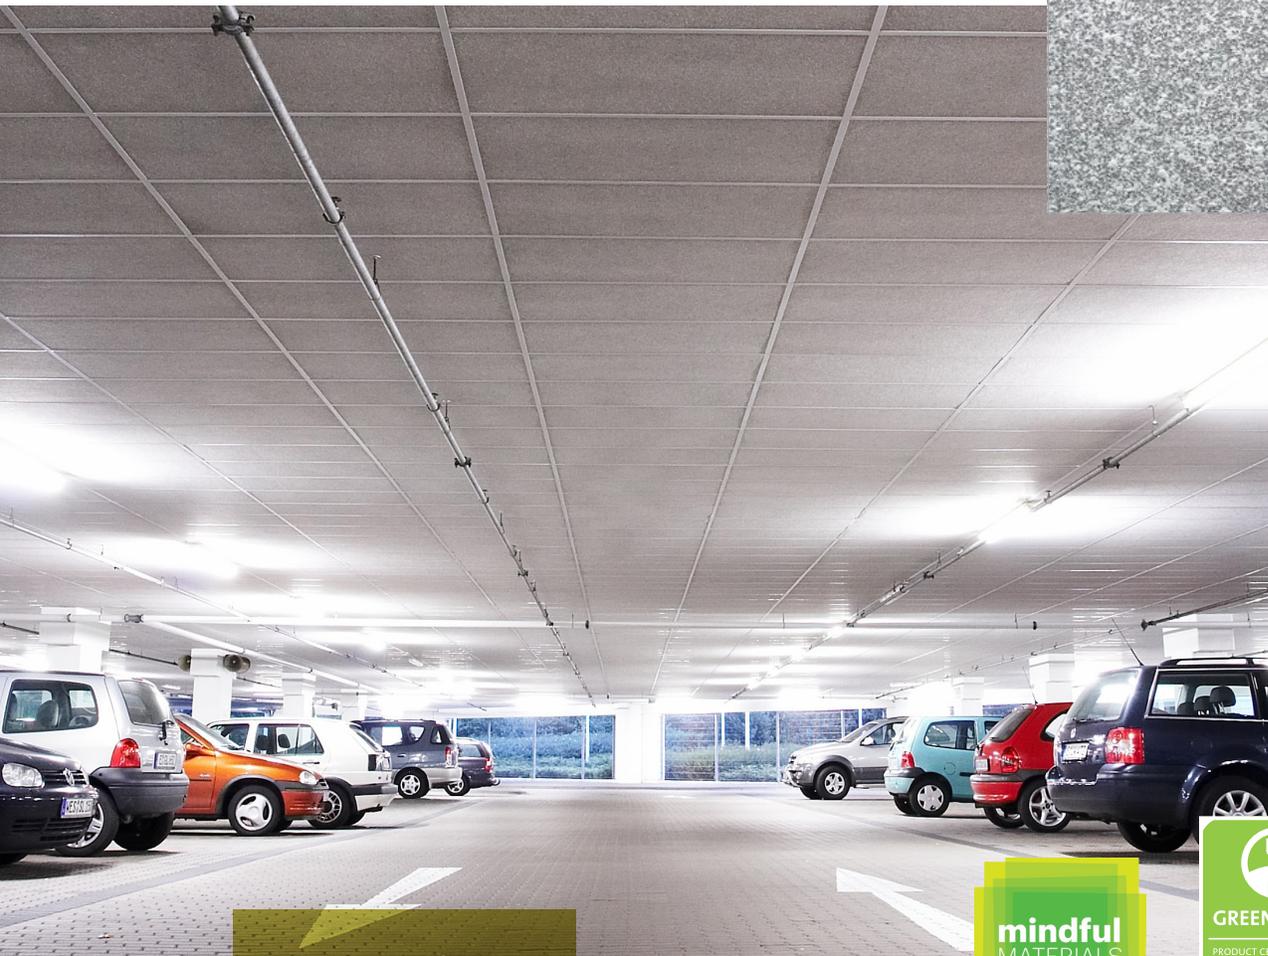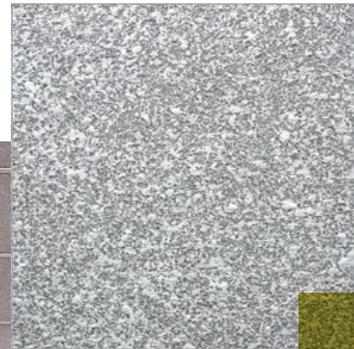

Rockfon ceiling tiles are manufactured using advanced stone wool technology. All stone wool tiles benefit from:



**High Acoustic Absorption**



**Fire Performance - Class A**



**Moisture and Sag Resistance**



**Smooth, Modern Aesthetics**

### Materials and Resources (MR)

- Waste Management Planning
- Interiors Life Cycle Impact Reduction
- Environmental Product Declarations
- Sourcing of Raw Materials
- Material Ingredients
- Waste Management

### Indoor Environmental Quality (EQ)

- Low-Emitting Materials ✓
- ✓ Interior Lighting ✓
- ✓ Acoustic Performance ✓

**Recycled Content:** 53%



## Standard Panels



### Packaging Information

| Edge Designation | Item Number | Modular Size (nominal) | NRC              | AC   | Fire Class | Light Reflectance | Sag Resistance (relative humidity) | Low VOC    | lbs/sqft | sqft/carton |    |
|------------------|-------------|------------------------|------------------|------|------------|-------------------|------------------------------------|------------|----------|-------------|----|
|                  | SQ          | 5100                   | 2' x 4' x 1 1/2" | 1.00 | -          | A                 | 0.68                               | up to 100% | ✓        | 0.82        | 40 |
|                  | SQ          | 5200                   | 2' x 4' x 4"     | 1.00 | -          | A                 | 0.68                               | up to 100% | ✓        | 1.93        | 16 |

Recycled content values for our stone wool tiles and panels are based on 2021 production averages of a standard 2'x4' tile, and based on their primary production location.

### 15/16" Suspension Systems

200, 1200 and Fire Rated systems

SQ - Square Lay-In





## Rockfon® Facett™ Properties

### Material

Stone wool (Mineral Wool) ceiling tiles with factory applied latex paint on glass scrim surface  
 ASTM E1264 CLASSIFICATION: Type XX - Stone wool base with membrane-faced overlay, Pattern E



#### Fire Performance

Surface burning characteristics:  
 UL723 (ASTM E84) Flame Spread Index: 0  
 Smoke Developed Index (UL Labeled): 5  
 CAN/ULC S102 Flame Spread Index: 5  
 Smoke Developed Index: 0



#### Sustainability

Many of Rockfon stone wool acoustic solutions are GREENGUARD Gold low VOC certified and meet the State of California's Department of Public Health Services Standard Practice for Specification Section 01350 (California Section 01350) for testing chemical emissions.

Selected potential applications: LEED, WELL, CHPS, Green Globes, BREEAM Int. and CALGreen



#### Cleaning

Vacuum  
 Damp cloth



#### Environment

53% recycled content. Recycled content based on U.S. manufacturing.



#### Warranty

30-Year Limited Product Warranty  
 See rockfon.com



#### Thermal Insulation

R Value (BTU Units): 5.3 - 14  
 RSI Value (Watts Units): 0.92 - 2.47



#### Hygiene

Stone wool provides no sustenance to microorganisms



GREENGUARD Gold Certified  
 for Office and Educational  
 Environments



CERTIFIED Environmental  
 Product Declaration

2022 | Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.  
 © ROCKWOOL International A/S 2018. All rights reserved.  
 ® denotes a trademark that is registered in the United States of America.

072022

### Rockfon

4849 S. Austin Ave.  
 Chicago, IL 60638 USA

Tel. +1-800-323-7164

Fax. +1-800-222-3744

rockfon.com