


Installation Guide

Chicago Metallic SpanFast® Center Support System

1-3/8" Drywall Suspension Furring Runner System

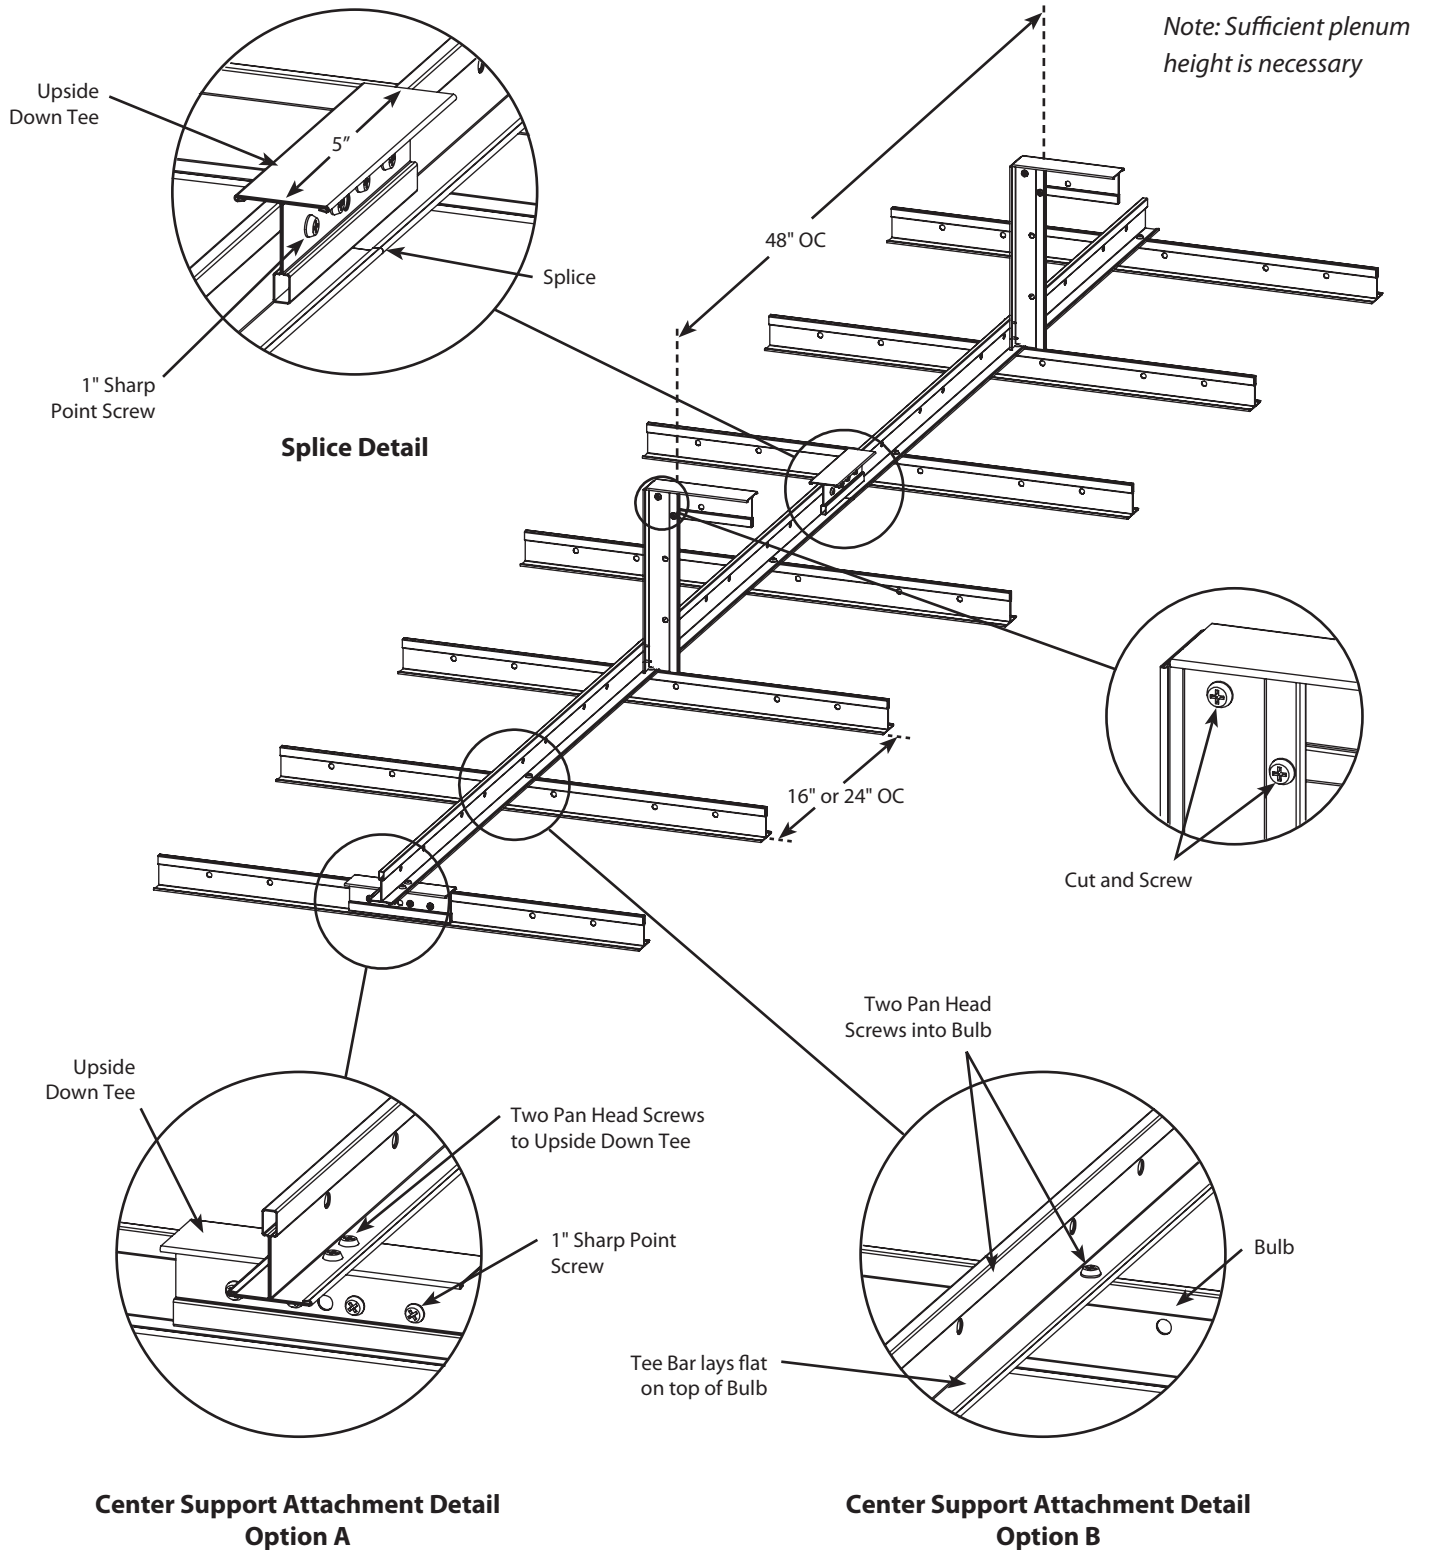


Installation Guide

Chicago Metallic SpanFast® Center Support System

1-3/8" Drywall Suspension Furring Runner System

1. Component Load Test Data

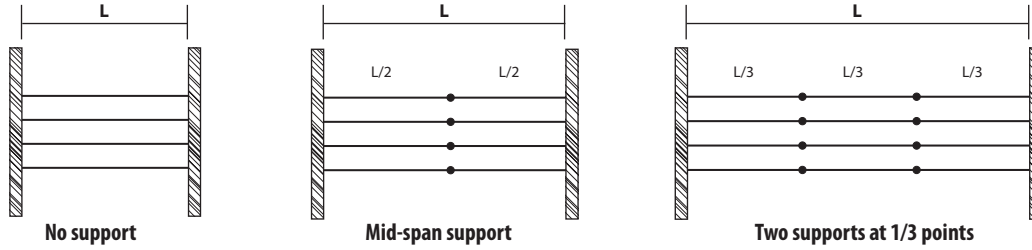

			Allowable Load (lb/ft ²) With No Lateral Bracing at L/240 (per ASTM C 645)										
			Span										
Number	Length	Spacing	No Support				Mid-span Support					Two Supports at 1/3 Points	
			4'	5'	6'	7'	7'	8'	10'	12'	14'	14'	
640SE.072	6'	16"			6.05								
640SE.072	6'	24"			4.03								
640SE.096	8'	16"	18.80					18.80					
640SE.096	8'	24"	12.50					12.50					
640SE.120	10'	16"		10.23					10.23				
640SE.120	10'	24"		6.80					6.80				
640SE.120	12'	16"			6.05					6.05			
640SE.120	12'	24"			4.03					4.03			
640SE.168	14'	16"				3.86						3.86	
640SE.168	14'	16"					28.57						12.23
640SE.168	14'	24"					19.00						8.14

ROCKFON, LLC | 4849 S. Austin Ave., Chicago, IL 60638 USA

Tel. +1-800-323-7164 | Fax. +1-800-222-3744 | www.rockfon.com | cs@rockfon.com | 10-2015