


Use of Direct Hang Clip for Metal and Acoustical Ceilings


For Use with Secondary Suspended Ceiling Areas/ Acoustical Clouds and Baffles

This clip allows additional loads to be hung from an existing ceiling, while minimizing the deflection the load might normally cause by transferring the weight of the additional load directly to a supporting hanger wire.

The 410.00 clip is designed to be used with standard 15/16 inch ceiling suspension systems. The clip simply installs over the web of the existing grid component and lines up with the hanger holes. A hanger wire is then installed per ASTM C636 through the aligned holes of the clip and the existing grid. The additional load is then hung from a second wire inserted through the holes at the bottom of the clip. This transfers the additional load (such as secondary ceiling) from the grid directly to the hanger wire.

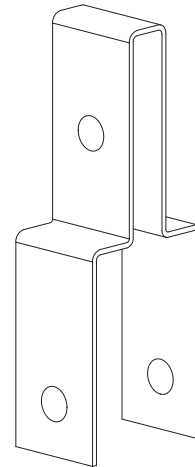

410.00 Direct Hang Clip

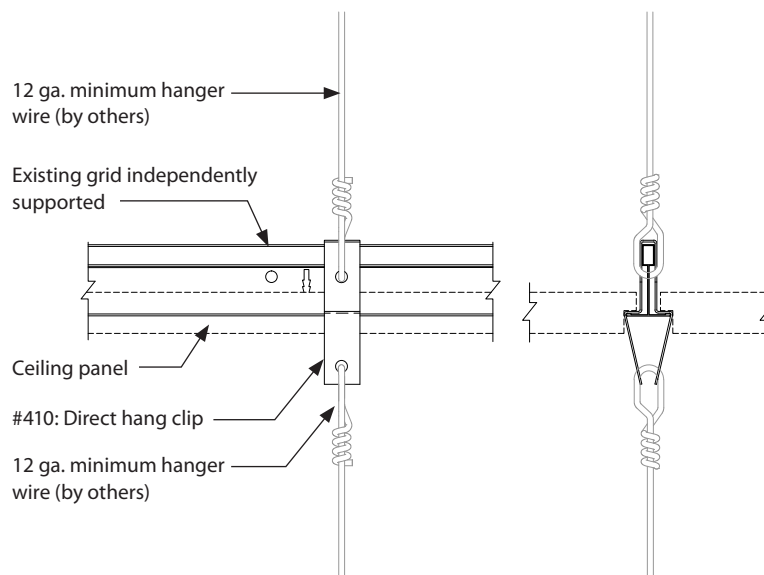

Have questions?

Contact the Rockfon Technical Services Team by calling 800-323-7164 and we can provide assistance on your project.

Rockfon 4849 SOUTH AUSTIN AVE., CHICAGO, IL 60638
USA and Canada: 800-323-7164 / Fax: 800-222-3744 / rockfon.com

Date: 06.2017 | Subject to alterations in range and product technology without prior notice.
Rockfon accepts no responsibility for printing errors.