

Chicago Metallic[®] 4600 Ultraline™ 9/16"


Features and Benefits

- 9/16" narrow face bolt slot suspension system with 1/8" reveal
- Suspension system is available as Heavy Duty, or Intermediate Duty, with stab-end cross tees
- Suitable for Seismic Design Categories A-F
- Suspension system available in (4600) non-fire rated, and in (4600HRC) high recycled content
- Sustainable: Minimum 30% recycled content, 100% locally recyclable
- Chicago Metallic suspension systems meet Class-A flame spread rating in accordance with ASTM standard E84

Applications

- Lobbies
- Airports
- Conference Rooms
- High End Applications

Acoustical Ceiling Suspension System

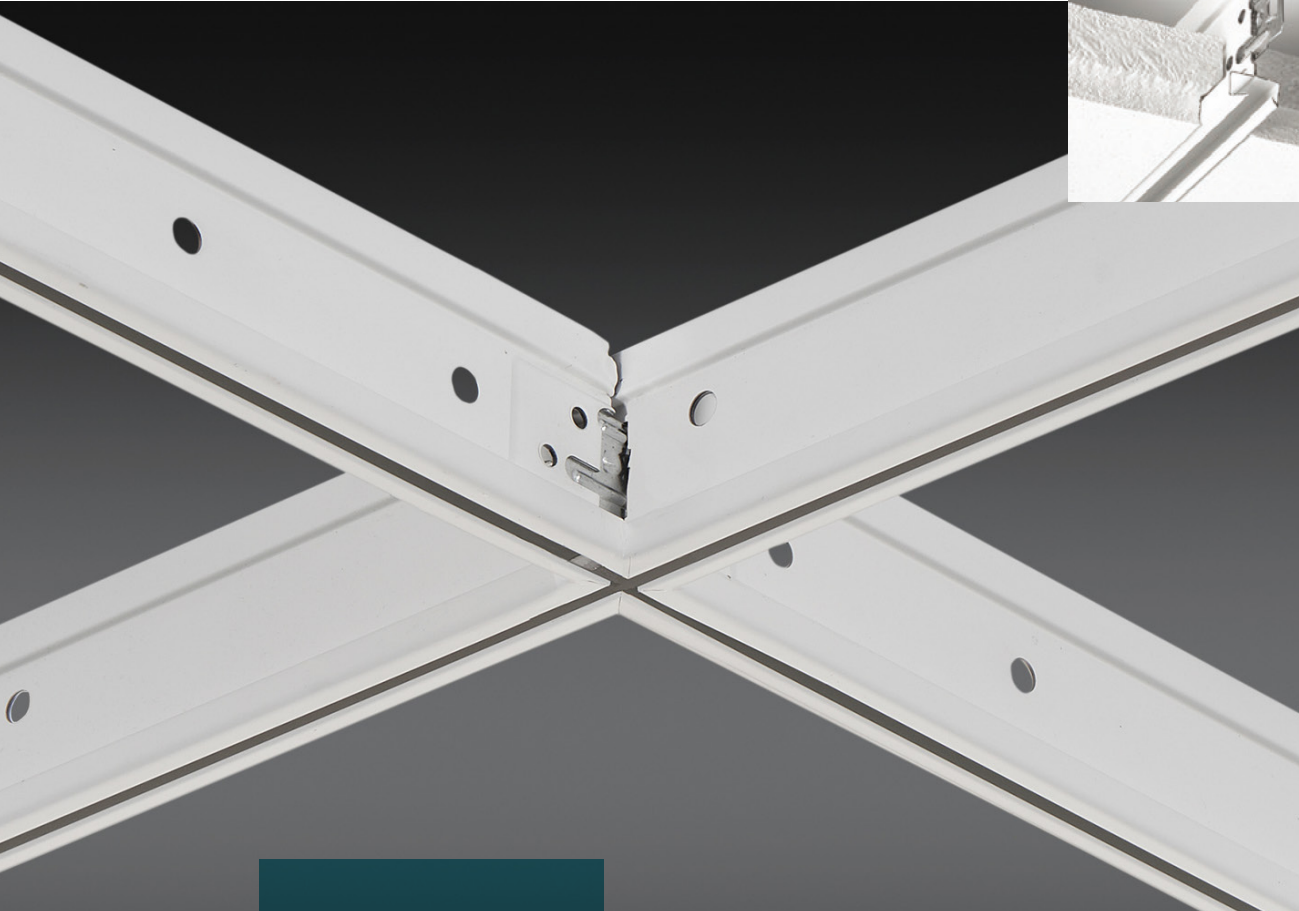

Chicago Metallic® 4600 Ultraline™ 9/16"



LEED® v4.1 Highlights

Materials and Resources (MR)

- Waste Management Planning ✓
- Interiors Life Cycle Impact Reduction ✓
- Environmental Product Declarations ✓
- Sourcing of Raw Materials ✓
- Material Ingredients ✓
- Waste Management ✓

Indoor Environmental Quality (EQ)

- Low-Emitting Materials ✓
- Interior Lighting ✓
- Acoustic Performance ✓

Recycled Content 30%
HRC Products 65%

Performance Properties:


Base Material	Commercial Quality Painted Galvanized Steel
End Details	Main Runners: Non-Directional Bayonet Coupling Cross Tees: Stab-End
Structural Classification	Intermediate and Heavy Duty per ASTM C635
Flame Spread Rating	Class A per ASTM E84
Warranty	40-Year Suspension System Warranty
Recycled Content	Steel 30%, HRC Products 65%

Main Runners/Cross Tees

Detail	Product Number	Length x Height (A) x Face (B)	Slotting	Notches	Structural Classification (ASTM C635)	Seismic	Packaging			Palletization	
							Pcs/Ctn	LF/Ctn	Lbs/Ctn	Ctn/Pallet	Lbs/Pallet
Main Runners											
	4601.01	120" x 1-3/4" x 9/16"	15" OC	30" OC	ID	A-C	20	200	51	24	1224
	4602.01	120" x 1-3/4" x 9/16"	10" OC	20" OC	ID	A-C	20	200	51	24	1224
	4600.01	144" x 1-3/4" x 9/16"	12" OC	24" OC	ID	A-C	20	240	60	24	1440
	4630.01	144" x 1-3/4" x 9/16"	12" OC	24" OC	HD	A-F	20	200	51	24	1224
	4640.01	144" x 1-3/4" x 9/16"	24" OC	48" OC	ID	A-C	20	240	60	24	1440
	4660.01	144" x 1-3/4" x 9/16"	24" OC	48" OC	HD	A-F	20	240	61	24	1464
	4630.01HRC	144" x 1-3/4" x 9/16"	12" OC	24" OC	HD	A-F	20	200	51	24	1224
Cross Tees											
	4611.01	12" x 1-3/4" x 9/16"	No Slots	No Notches	-	A-F	80	80	20	Palletized to Order	Palletized to Order
	4620.01	20" x 1-3/4" x 9/16"	No Slots	No Notches	-	A-F	70	116	29	Palletized to Order	Palletized to Order
	4612.01	24" x 1-3/4" x 9/16"	No Slots	No Notches	-	A-F	70	140	36	50	1800
	4612.01HRC	24" x 1-3/4" x 9/16"	No Slots	No Notches	-	A-F	70	140	35	50	1800
	4613.01	30" x 1-3/4" x 9/16"	No Slots	No Notches	-	A-F	70	140	35	Palletized to Order	Palletized to Order
	4614.01	48" x 1-3/4" x 9/16"	Slot at Midpoint	Notch at Midpoint	-	A-F	40	160	41	42	1722
	4618.01	48" x 1-3/4" x 9/16"	Slot at Midpoint	Notch at Midpoint on One Side	-	A-F	40	160	41	42	1722
	4624.01	48" x 1-3/4" x 9/16"	No Slots	No Notches	-	A-F	40	160	41	42	1722
	4614.01HRC	48" x 1-3/4" x 9/16"	Slot at Midpoint	Notch at Midpoint	-	A-F	40	160	41	42	1722
	4615.01	60" x 1-3/4" x 9/16"	30" OC	30" OC	-	A-F	40	160	41	Palletized to Order	Palletized to Order
	4621.01	60" x 1-3/4" x 9/16"	No Slots	No Notches	-	A-F	40	200	51	Palletized to Order	Palletized to Order
	4616.01*	72" x 1-3/4" x 9/16"	24" OC	No Notches	-	A-F	40	160	41	Palletized to Order	Palletized to Order
	4628.01*	96" x 1-3/4" x 9/16"	24" OC	No Notches	-	A-F	20	160	41	Palletized to Order	Palletized to Order


* For 6' and 8' Cross Tees, wires required at mid point for loads exceeding weight of Rockfon tile.
Custom slotting available. Contact Rockfon Customer Service for details and service levels.

Compatible Tile Edge Type




Grid Colors

Standard Colors:





Perimeter Components

Wall Angles




Product Number	Length, Height (A) x Face (B)	Packaging			Palletization	
		Pcs/Ctn	LF/Ctn	Lbs/Ctn	Ctn/Pallet	Lbs/Pallet
1420.01	144", 15/16" x 15/16"	42	504	74	30	2070
1420.01HRC	144", 15/16" x 15/16"	42	504	74	30	2070
21420.01	144", 15/16" x 15/16"	25	300	41	40	1640
1480.01	144", 9/16" x 15/16"	25	300	39	30	1170
1480.01HRC	144", 9/16" x 15/16"	25	300	39	30	1170
1467.01	144", 15/16" x 1-3/16"	20	240	40	40	1600
1430.01	144", 7/8" x 7/8"	30	360	52	40	1960
1425.01	144", 2" x 2"	20	240	82	28	2296
1428.01	144", 1" x 2"	20	240	54	40	2160

Specialty Wall Angles




1485.01




1427.01

Product Number	Length, Height (A) x Face (B)	Packaging			Palletization	
		Pcs/Ctn	LF/Ctn	Lbs/Ctn	Ctn/Pallet	Lbs/Pallet
1485.01	96", 1-1/8" x 7/8" Flexible Wall Angle (White)	63	504	29	Palletized to Order	Palletized to Order
1427.01	144", 15/16" x 15/16" Pre-punched Angle (White)	42	504	74	30	2070

Wall Channels



Shadow Moldings





Product Number	Length, Height x Face x Top Flange (Length, A x B x C)	Packaging			Palletization	
		Pcs/Ctn	LF/Ctn	Lbs/Ctn	Ctn/Pallet	Lbs/Pallet
1448.01	120", 1-9/16" x 15/16" x 3/4"	30	300	74	18	1330
1449.01	120", 1-15/16" x 15/16" x 15/16"	24	240	62	18	1307

Product Number	Length, Height x Face x Reveal (Length, A x B x C x C)	Packaging			Palletization	
		Pcs/Ctn	LF/Ctn	Lbs/Ctn	Ctn/Pallet	Lbs/Pallet
1468.01	120", 3/4" x 3/8" x 3/8" x 15/16"	40	400	76	28	2128
1460.01	120", 3/4" x 3/4" x 3/8" x 3/8"	40	400	64	32	2048
1461.01	120", 3/4" x 3/4" x 3/4" x 3/4"	40	400	90	28	2520
1464.905	120", 15/16" x 15/16" x 1/4" x 1/4"	40	400	63	28	1818
1469.01	120", 9/16" x 15/16" x 3/8" x 3/8"	40	400	77	Palletized to Order	Palletized to Order
1466.01	144", 1-3/4" x 1-1/4" x 3/4" x 1/4"	20	240	61	20	1220

Accessories

	Detail	Rockfon Part Number	Product Number	Product Description	Packaging	
					Pcs/Ctn	Lbs/Ctn
Seismic Clips		250374	1496.00	Seismic Perimeter Clip	100	10
		250372	1493.00	Unopposed Tee Clip	100	2
		250373	1494.00	Seismic Separation Clip	100	10
General Clips		250348	935.00	Universal Hold Down Clip	1000	16
		252923	425.01	Hold Down Clip for 5/8" Board	200	2
		250343	820.00	Hold Down Clip for 5/8" Board	1000	7
		237949	490.00	Hold Down Clip for 0" - 3/4" Panels (Black)	100	2
		237952	491.00	Hold Down Clip for 3/4" - 1-1/4" Panels (Blue)	150	2
		237954	492.00	Hold Down Clip for 1-1/2" Panels (Grey)	100	2
		250324	426.01	Butterfly Retention Clip for 0" - 1" Panels	200	15
		250325	427.01	Butterfly Retention Clip for 1" - 2" Panels	150	15
		254302	88.00	Border Spring Clip	1000	17
		253183	479.00	90-degree Corner Clip	25	5
	251952	1499.00	Perimeter Grid Clip	100	4	
Spacer Bars		294621	826.00H	2' Spacer Bar for rectangular bulb components	40	15
		294623	828.00H	4' Spacer Bar for rectangular bulb components	40	29
		294619	824.00H	4' Spacer bar notched 2'. For rectangular bulb components.	40	29

	Detail	Rockfon Part Number	Product Number	Product Description	Packaging	
					Pcs/Ctn	Lbs/Ctn
Notch Cover		318124	3699.01	4600 System Notch Cover	100	1
Corner Caps		Outside/Inside Corner Caps – Refer to Rockfon Grid and Tile Accessories Datasheet for options				

Hanger Wire		250590	96CTL144	Hanger Wire 12' x 12-Gauge	Bundle	50
Grid Paint		250350	940.01	12 oz. Grid Spray Can - White	1	1
		250351 & 250352	940.08 & 940.44	12 oz. Grid Spray Can - Black & Satin Silver	1	1
Tools		250349	937.00	Cross Tee Slotter	1	3
		250353	943.00	Cross Tee Removal Tool	1	1
		250354	944.00	Wire Tie Tool	1	1

Performance

Main Runner Allowable Load Test Data Based on 1/360 Span Deflection (Lb/Ft*)

Main Runner	Length	Hanger Spacing		
		ASTM C635 - 4'	5'	6'
4601.01	120"	ID	7.7	4.6
4602.01	120"	ID	7.7	4.6
4600.01	144"	ID	7.7	4.6
4630.01	144"	HD	9.3	5.6
4640.01	144"	ID	7.7	4.6
4660.01	144"	ID	9.3	5.6
4630.01HRC	144"	HD	9.3	5.6

Hanger wire must be installed within 3" of fire break along Main Runner in fire-rated installations.

Material

ASTM C635 Heavy Duty (HD) and Intermediate Duty (ID) main tee classifications; commercial quality painted galvanized steel, 9/16" wide with 1/8" center reveal, 1-3/4" height.

Note: A metallurgist should be consulted regarding the suitability of this product for the environmental conditions in which it is being installed.

Cross Tee Allowable Load Test Data Based on 1/360 Span Deflection (Lb/Ft*)

Cross Tee	Length	Cross Tee Span				
		2'	4'	5'	6'	8'
4612.01	24"	55.0◆	-	-	-	-
4612.01HRC	24"	55.0◆	-	-	-	-
4614.01	48"	-	14.6	-	-	-
4618.01	48"	-	14.6	-	-	-
4624.01	48"	-	13.1◆	-	-	-
4614.01HRC	48"	-	14.6	-	-	-
4615.01	60"	-	-	7.7	-	-
4621.01	60"	-	-	4.3◆	-	-
4616.01	72"	-	-	-	13.1●	-
4628.01	96"	-	-	-	-	13.1●

* To convert data into lb/ft², divide on center spacing of suspension component into lb/ft.

◆ Limited by safety factor of 2.

● Hanger wire support at midspan of 6' and 8' cross tee.

Install systems in accordance with ASTM C636. Other requirements may apply.

Non-Fire-Rated Light Fixture Allowable Load Test Data Based on 1/360 Span Deflection (Lbs)

Light Fixtures	Allowable Fixture Weight - Lbs. Main Runners & Cross Tees		
	4600.01 4614.01	4630.01 4614.01	4630.01HRC 4614.01HRC
2' x 2'	42.4	42.4	42.4
2' x 4'	58.4	58.4	58.4

Allowable fixture weight is based on single fixture in the field only.

For end-to-end, tandem or other configurations, contact Rockfon Technical Support.

081122

Rockfon

4849 S. Austin Ave.
Chicago, IL 60638 USA

Tel. +1-800-323-7164

cs@rockfon.com

rockfon.com

2022 | Subject to alterations in range and product technology
without prior notice. Rockfon accepts no responsibility for printing errors.
© ROCKWOOL A/S 2022. All rights reserved.
® denotes a trademark that is registered in the United States of America.